Important Information

Regarding your New Sprayer

from SDI

Jacobsen-Textron Models: 4119804, 2703540, 4119805, 2703541, 4119806, 2703542, 4119807 and 2703543

SDI Models: VM160D/DSU, VM225D/DSU and VM300D/DSU

Please read the enclosed information before assembling and/or using your new sprayer supplied by:

Spraying Devices, Inc.



Manufacturer of Quality Power Sprayers P. O. Box 3107 • Visalia, CA. 93278-3107 • USA Tel: (559) SDI-5555 • Fax: (559-734-5591 email: sales@sprayingdevices.com Sprayer Installation Service Bulletin

for the following Sprayer Models:

Jacobsen-Textron Models:


4119804, 2703540, 4119805, 2703541, 4119806, 2703542, 4119807 and 2703543

SDI Models:

VM160D/DSU, VM225D/DSU and VM300D/DSU

CAUTION!

Remove the trailer hitch from the Turf Truckster® frame prior to mounting the sprayer. Failure to remove the hitch will damage the sump area of the spray tank.

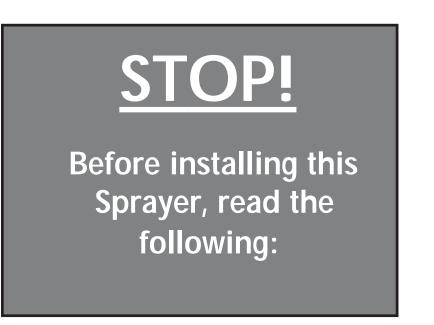

Additional Caution Instructions for Jacobsen-Textron Sprayers

Models 4119804, 2703540, 4119806 and 2703542

This Sprayer is intended to run on a truck that has the standard hydraulics <u>ONLY!</u>

<u>DO NOT</u> use on a truck with a high-low hydraulic kit! Damage to sprayer and/or truck may occur.

Unauthorized application of sprayer will void sprayer warranty!



Before installing this Sprayer, read the following:

Additional Caution Instructions for <u>Jacobsen-Textron Sprayers</u> Models 4119805, 2703541, 4119807 and 2703543 & SDI Models VM160D/DSIL VM225D/DSIL and VM200D/DSIL

SDI Models VM160D/DSU, VM225D/DSU and VM300D/DSU

This sprayer is intended to run on a truck that has the high-low hydraulic kit <u>ONLY!</u>

The truck must be operated in the <u>low</u> position (5 gpm) ONLY for proper performance.

Under no circumstances, should the sprayer be used in the high position (9 gpm) mode on a high-low sprayer. Failure to use in the proper setting will cause damage and void warranty.

3/29/05jh