



Windbreaker 2000 Shielded Spray Boom



Do windy days put a hold on your spray operations? The SDI Windbreaker 2000 Shielded Spray Boom offers you the ability to spray at those times you are unable to use a conventional spray boom because of wind or potential drift problems. The 15 foot wide spray boom has three individual floating sections that maintain a consistent spray height over undulating terrain.

Standard Features Include:

- ◆ The 3 section floating design has gauge wheels that adjust to maintain a consistent boom height.
- ◆ The wing sections have bi-directional break-aways that also fold up for transport or forward for storage.






Standard Features continued:

- ◆ The strong and lightweight custom molded fiberglass shields and flexible spray skirt provide a drift free spray application.

- ◆ The Non-trailing design means that the entire boom is carried by sprayer in the non-spray transport mode. When spraying, all three sections ride on gauge wheels.

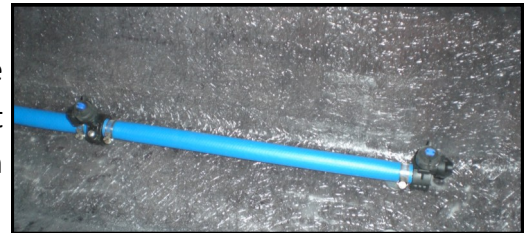

- ◆ Using a dry boom design, each section has 3 single nozzles on 20 inch centers for a total of 9 nozzles on the boom with TP8003VP spray tips.



- ◆ The Windbreaker 2000 is constructed from rugged, welded steel tubing for strength and then epoxy coated for a long service life.

- ◆ Mounts easily to any SDI sprayer.

- ◆ Light weight - only 255 pounds.

- ◆ OPTIONS - Hydraulic/Electric Lift Actuator Kits for the wing sections & center section. Also a Wilger Tip Monitor is available to give you a visual reference on the nozzles under the hood.



Spraying Devices Inc.
 447 E. Caldwell Ave • Visalia, CA 93277
 (559)734-5555 • www.sprayingdevices.com
sales@sprayingdevices.com