


No. 1999A

Solenoid Valve - 18 GPM, 175 PSI, 12 Volt. DC.

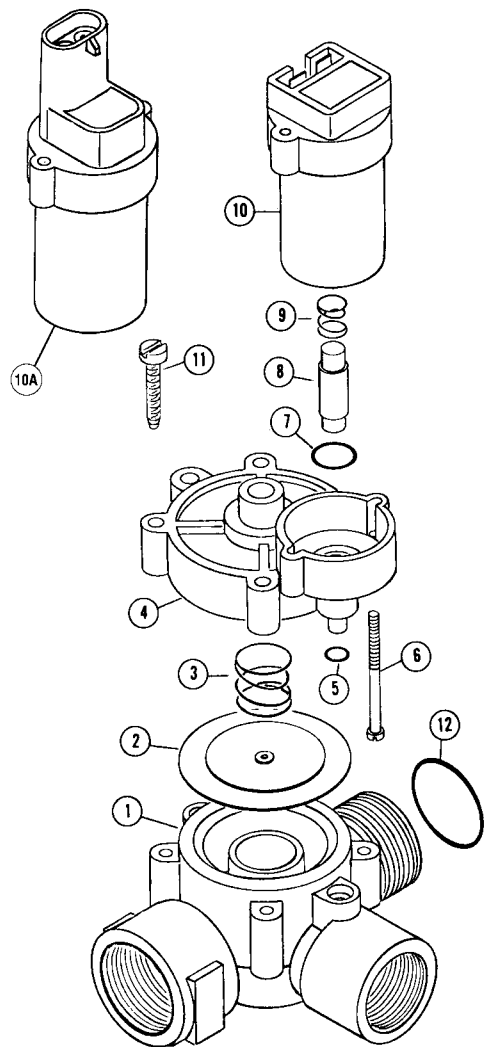

PARTS LIST

Ref.	Part No.	Description	No. Req.
1	1962	Valve Body.....	1
2	*1974	Viton Diaphragm Assembly, Standard	1
2	(1)2109	Aflas Diaphragm Assembly, Optional	1
3	(1)*1975	Spring	1
4	1963	Valve Cover	1
5	(1)*1976	Viton "O" Ring 010	1
6		6-32 x 2 5/8 Screw w/Hex Nut	2
7	(1)*1977	Viton "O" Ring 014	1
8	*2239	Plunger w/Viton Seat, Standard.....	1
8	(1)2240	Plunger w/Aflas Seat, Optional.....	1
9	(1)*1979	Plunger Spring	1
10	2515	Coil Assembly	1
10A	2520	Coil Assembly, Weather Pack	1
11		No. 8 x 1 1/2 Screw.....	4
12	2168	"O" Ring 022	1
	2517	Viton Repair Kit – consists of items marked *	
	2518	Aflas Repair Kit – consists of items marked (1)	

SPECIFICATIONS

- Valve HousingGlass Filled Nylon
- Wetted Metal Parts304 and 430 Stainless Steel
- Diaphragm, Seat and Seals.....Viton, Standard, Aflas, Optional
- Coil.....Epoxy Encapsulated
- Terminals.....1/4" Male Tabs or Weather Pack
- Voltage12 Volt. DC. (Other Available)
- Current.....1.1 AMP at 12 Volt.
- Pressure175 PSI Max., 10 PSI Min.
- Flow.....0-18 GPM 8 CV
- Actuating Pressure.....5 PSI