



<u>Item No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Qty.</u>
1	55-212	Male Hose Coupling, 1/2"	1
2	24-203	Hose Clamp, J203	2
3	51-501SS	Nipple 3/4" x Clo, SST	2
4	50-520SS	Tee 3/4", SST	1
5	51-510SS	St Elbow 3/4" x 90°, SST	1
6	60-324	Ball Valve 3/4"	1
7	55-106	Adapter 3/4 MPT x 3/4" MGHT	1
8	55-211	Female Hose Coupling 1/2"	1
9	81-500	Hose, 1/2" 800 PSI, Per Foot (81-132 - suggested 2-1/2 Ft).	Specify
9	81-500	Hose, 1/2" 800 PSI, Per Foot (81-133 - suggested 3-1/3 Ft).	Specify
10	11-120	Hose Reel Support - 81-132 Only	2
10	11-119	Hose Reel Support - 81-133 Only	2
11	11-401	Gun Holder	1
12	41-503	Flat Washers 3/8"	6
13	41-450	Well Nuts 3/8 x 3/4"	2
14	32-504	Cap Screws 3/8 x 1-1/4", SST	4
15	32-505	Cap Screws 3/8 x 1-1/2", SST	2
16	43-503	Lock Washers 3/8", SST	4
17	41-513	Nut 3/8", SST	4
N/A	42-706	Fender Washer 3/8", SST	4

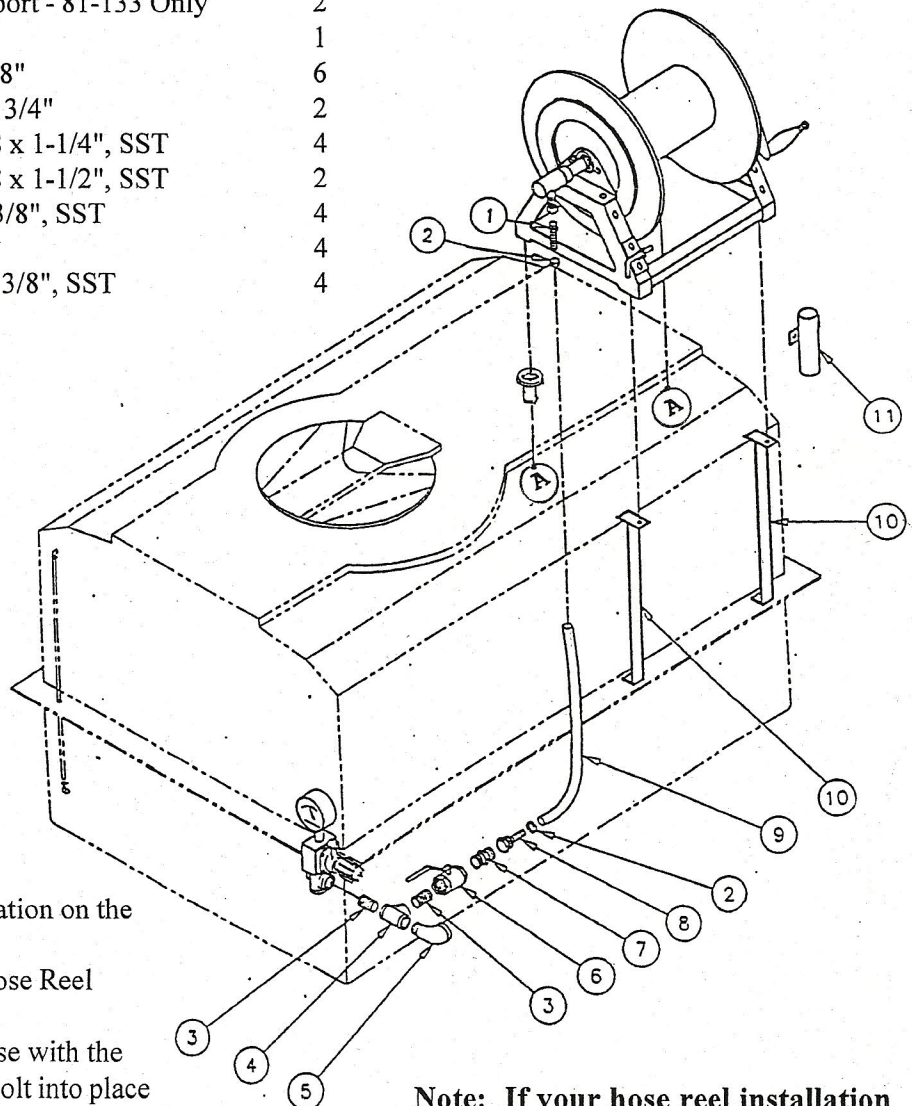

**Detail "A" - Drill two 3/4" Holes
for Well Nuts:**



Mounting Instructions:

1. Place the Hose Reel in the desired location on the tank and mark the hole locations
2. Drill 3/4" holes in tank to match the Hose Reel
3. Insert the well nuts through each hole
4. Line up the holes in the Hose Reel Base with the holes you have drilled in the tank and bolt into place
5. Install additional plumbing and connect hose to Hose Reel
6. Install the Gun Holder in a convenient location

Note: If your hose reel installation requires drilling into the tank, the tank interior **MUST be vacuumed and flushed prior to operation. Failure to do so will cause clogging of the system's filters and screens.**

**SDI Hose Reel Mounting
Kit, Part No. 81-132 and
81-133**

PI38/1007jj